

# Tank Farm Liner Systems

## XR-5 and HDPE

### XR-5 Quick Overview

- ✓ Stability is excellent, with low thermal expansion-contraction properties
- ✓ XR-5 grade is high strength and chemically resistant for maximum resistance to high temperatures and a broad chemical resistance, including acids, oils and methane
- ✓ XR-5 was formulated for long term outdoor exposure to UV rays
- ✓ Florida Department of Environmental Protection approved for secondary containment


Completed installation of approximately 215,000 square feet of XR-5 liner material



Approximately one foot of dirt was removed and elevation was established for storm water drainage.



Slip resistant access points and ramps were installed using recycled tires—a designated green product.

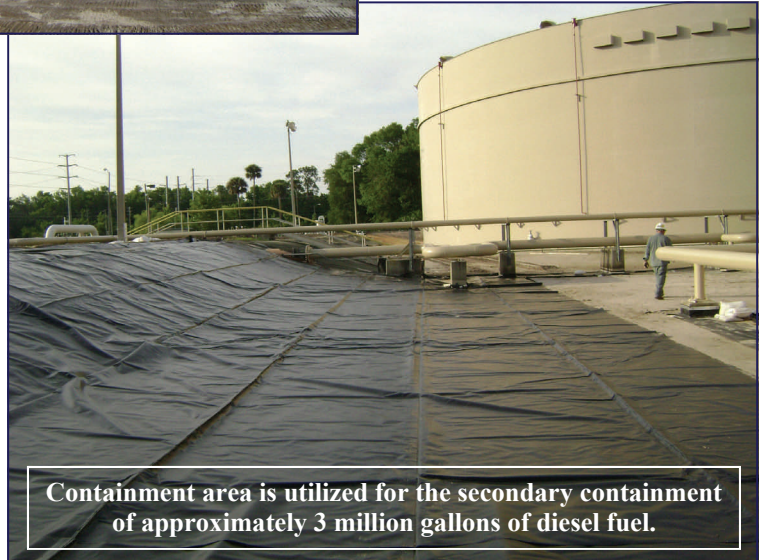

Containment area is utilized for the secondary containment of approximately 3 million gallons of diesel fuel.

## Reservoir Lining and Waterproofing Installations & Repairs



- Available in Polyurea, XR-5, and HDPE
- Earthen & Concrete Applications
- UV & Puncture Resistant
- Potable Water Approved